


Serial Data Distributors NVRS-004DD

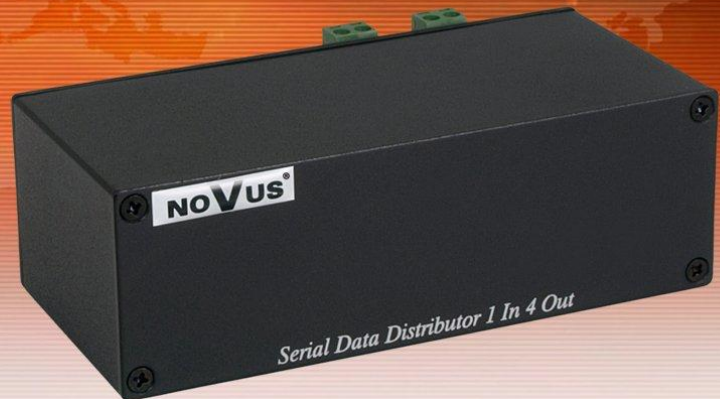

Caracteristici

- Intrare date: 1 x RS-232 sau 2 x RS-485, toate in modul standby, o singura intrare activa la un moment dat
- Iesire date: 4 x RS-485
- Campul de conexiuni max.: pana la 1200 m prin cablu UTP
- Posibilitate de conectare in cascada cu alte unitati NVRS-004DD
- Alimentare: 12 VDC (230 VAC/12 VDC PSU inclus)

Specificatii	Description
Model	active data distributor
Intrare Data Standard	RS-232 (D-Sub 9 pin)/2 x RS-485 (terminal surb)
Port de Iesire	4 port-uri (terminal surb)
Iesire Semnal Standard	RS-485
Distanta pe care e controlat semnalul transmis	pana la 1200 m
Alimentare	12 VDC (230 VAC/12 VDC PSU inclus)
Consum	4.2 W
Temperatura de lucru	0° ~ 55°C
Dimensiuni (mm)	133 (W) x 44 (H) x 76 (D)
Greutate	425 g
Cablu recomandat	Cablu CAT 5 UTP (Ø=0.5 mm)
Carcasa	Metal (negru)